
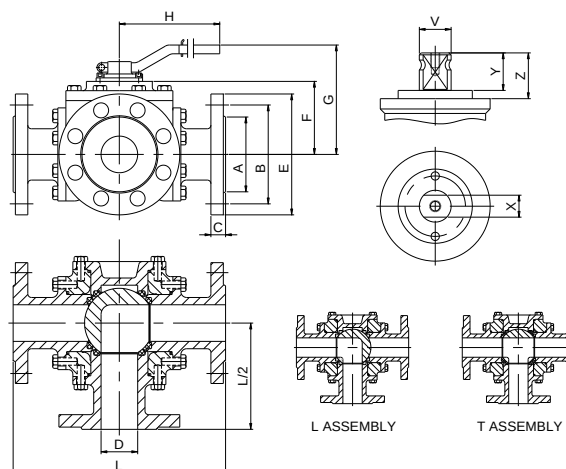


FIG.Z 86 TTT CL150 1"-8" L/T

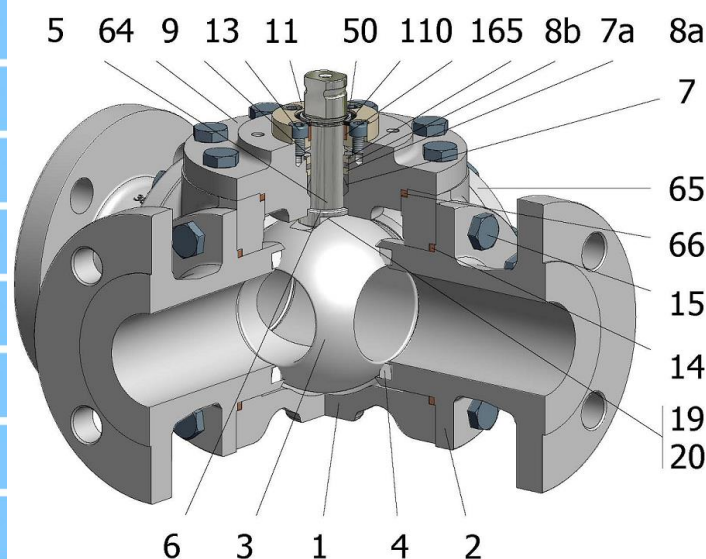

Position	Description	Material
01	Body 1	S.S. A351 CF8M
02	Body 2	S.S. A351 CF8M
03	Ball	S.S. A351 CF8M
04	Seat	PTFE (modified)
05	Stem	S.S. AISI 316
06	Stem seal	PTFE (modified)+FG
07	Stem packing	PTFE (modified)
07a	Stem packing 2	Graphite
08a	Gland packing 1	S.S. AISI 316
08b	Gland packing 2	S.S. AISI 316
09	Spring washer	S.S. AISI 301
11	Cover	S.S. A351 CF8M
13	Cover bolt	S.S. (316)
14	Body seal 1	PTFE (modified)
15	Body bolt	A193 B8M
16	Handle	WCB/A351 CF8M
17	Handle bolt	S.S. (316)
19	Spring	S.S. AISI 316
20	Antistatic ball	S.S. AISI 316
50	Subjection ring	S.S. AISI 420
64	Body cover	S.S. A351 CF8M
65	Body blind	S.S. A351 CF8M
66	Body cover seal	Graphite
110	Subjection ring seal	S.S. AISI 316 Nitrided
165	Stem bearing	PTFE (modified)+FG

General features



Floating ball.
Split body.
Full bore.
Soft seat.
Three way
Anti Blow out proof stem.
Anti static device.
Autoadjustable packing.
Self-cavity pressure relief.

Standards

Top flange ISO 5211
Flanges ANSI B16.5
Testing API 598, API 6D, BS 6755-1
Design API 6D, B16.34
Materials according to NACE MR0175

Official approvals

TA-LUFT VDI 2440
ISO 15848-1
ATEX 2014/34/EU
API 6D.
PED 2014/68/EU

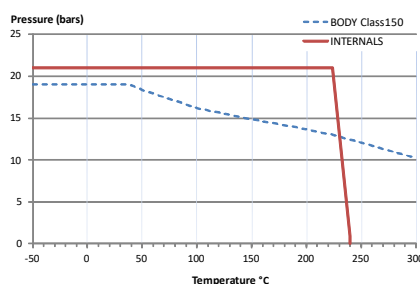**PEKOS GROUP CERTIFICATES:**
ISO 9001: 2015 / 2014/68/EU / API-6D**DIMENSIONS & Technical information**

DN	CL	D	L	E	A	B	C	F	H	G	V	X	Y	Z	n x d	ISO 5211	Torque	MAST	Weight
1"	150	25	230	110	51	79	12	67	185	115	18	14	17	19,5	4 x 16	F05	24	92	12
1 1/2"	150	40	260	125	73	98	15	82	293	136	22	17	20	30	4 x 16	F07	48	244	24
2"	150	50	290	150	92	121	16	90	293	144	22	17	20	30	4 x 19	F07	72	244	29
2 1/2"	150	65	340	180	105	140	18	109	450	182	28	22	22	40	4 x 19	F10	93	510	47
3"	150	80	380	190	127	152	20	132	740	229	36	27	35	50	4 x 19	F12	154	1047	70
4"	150	100	430	230	157	191	24	147	740	241	36	27	35	50	8 x 19	F12	217	1047	102
6"	150	150	480	280	216	241	26	216	750	310	48	36	40	63	8 x 22	F14	600	2482	178
8"	150	201	600	345	270	299	29	258	750	352	48	36	40	63	8 x 22	F14	1080	2482	301

** Depending on service conditions.

* Dimensions are in mm. * Torque & MAST are in Nm * Weight is in Kilograms

* Torque values have been measured ΔP at maximum rating at room temperature