
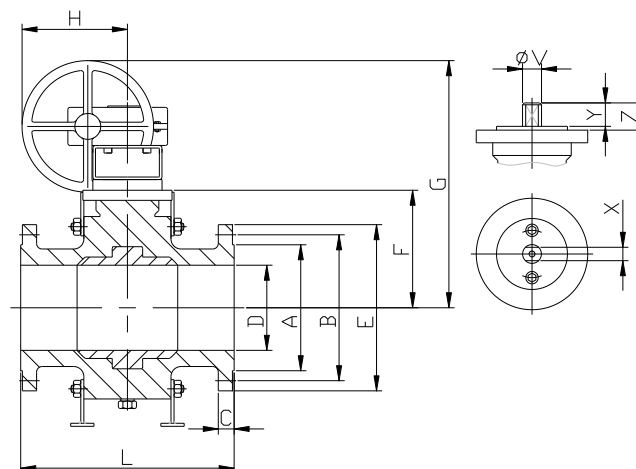


FIG.GKS 15 TGTGV CL150 6"-24"

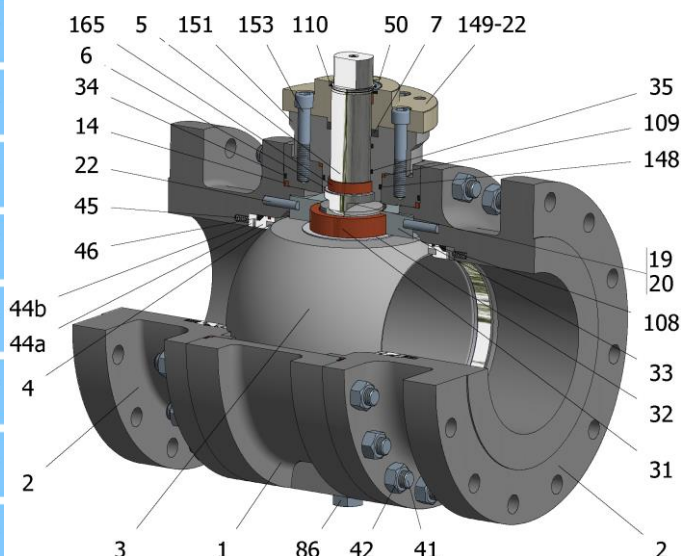

Position	Description	Material
01	Body 1	C.S. A350 LF2
02	Body 2	C.S. A350 LF2
03	Ball	C.S. A350 LF2+ENP
04	Seat	PTFE (modified)
05	Stem	A182 F51
06	Stem seal	PTFE (modified)+FG
07	Stem packing	Graphite
14	Body seal 1	PTFE (modified)
19	Spring	Inconel X750
20	Antistatic ball	Inconel 625
22	Stop pin	S.S. AISI 316
31	Bearing	MU
32	Bearing disk	PTFE (modified)+FG
33	Support bearing	S275JR+ENP
34	Body seal 2	Graphite
35	O ring stem	FKM
41	Stud	A320 L7M
42	Nut	A194 7M
44a	Ring seat 1	S.S. AISI 316
44b	Ring seat 2	S.S. AISI 316
45	Spring	Inconel X750
46	Seat seal	Graphite
50	Subjection ring	S.S. AISI 420
86	Drain plug	C.S. A350 LF2
86a	Vent plug	C.S. A350 LF2
108	O ring seat	FKM
109	Cover seal	Graphite
110	Subjection ring seal	S.S. AISI 316 Nitrided
148	O ring cover	FKM
149	ISO cover	C.S. A350 LF2
151	Body cover 1	C.S. A350 LF2
152	Body cover bolt	S.S. (316)
153	ISO cover bolt	S.S. (316)
165	Stem bearing	PTFE (modified)+FG

General features


Full trunnion.
Three pieces.
Full bore.
Soft seat.
Bidirectional.
Spring loaded seat system.
Anti Blow out proof stem.
Anti static device.
Self-cavity pressure relief.
Double Block and Bleed.

Standards

Top flange ISO 5211
Flanges ANSI B16.5
Face to face ANSI B16.10
Testing API 598, API 6D, BS 6755-1
Design API 6D, B16.34
Materials according to NACE MR0175

Official approvals

CERTIFICATE FIRE SAFE
TA-LUFT VDI 2440
ISO 15848-1
API 6D.
ATEX 2014/34/EU
PED 2014/68/EU
SIL 3 CAPABLE

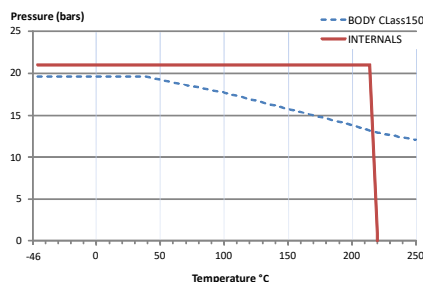

PEKOS GROUP CERTIFICATES:

ISO 9001: 2015 / 2014/68/EU / API-6D



DIMENSIONS & Technical information

DN	CL	D	L	E	A	B	C	F	H	G	V	X	Y	Z	n x d	ISO 5211	Torque	MAST	Weight
6"	150	150	394	280	216	241	27	210	271	531	36	27	35	50	8 x 22	F12	360	2356	115
8"	150	201	457	345	270	299	30	265	336	647	48	36	40	63	8 x 22	F14	555	5585	200
10"	150	252	533	405	324	362	32	301	336	683	48	36	40	63	12 x 25	F14	750	5585	385
12"	150	303	610	485	381	432	33	363	355	661	60	46	60	73	12 x 25	F16	930	11084	515
14"	150	337	686	535	413	476	36	393	355	691	60	46	60	73	12 x 29	F16	1580	11084	690
16"	150	385	762	595	470	540	38	433	430	788	60	46	60	73	16 x 29	F16	2120	11084	1220
18"	150	436	864	635	527	578	41	500	480	905	72	55	70	83	16 x 32	F25	2860	19103	1700
20"	150	487	914	700	584	635	44	534	532	943	72	55	70	83	20 x 32	F25	3585	19103	2100
24"	150	589	1067	815	692	749	48	622	781	1057	98	75	100	106	20 x 35	F30	4775	48235	3550

** Depending on service conditions.

* Dimensions are in mm.

* Torque & MAST are in Nm

* Weight is in Kilograms

* Torque values have been measured ΔP at maximum rating at room temperature

Rec del Molinar, 9-P-I. El Circuit -08160 Montmeló (Barcelona)-Spain

-The contents of this document are subject to change without prior notice due to the continuous development processes.

Tel.: (+34) 93 568 92 56

pekos@pekos.es